


GEN-ASW4000 Active subwoofer fit for a solution of conference room, multifunctional hall, small auditorium, living performance etc.

Features

18" driver

Frequency Response 30Hz-250Hz

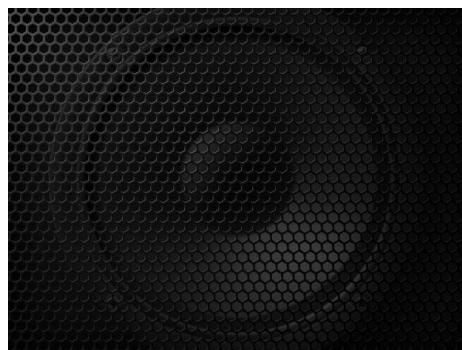

Specifications:

Frequency Response (-10db)	30Hz-250Hz
Woofer	18"
Input connectors	2 x XLR
Amplifier Power	4000 Watt (Peak)
Nominal Impedance	8Ω
Sensitivity (1W@ 1m)	121dB
Max. SPL @1m	142/148 dB (Peak)